


Interface Module

PoE-enabled reader module for up to 1 door

DS-51

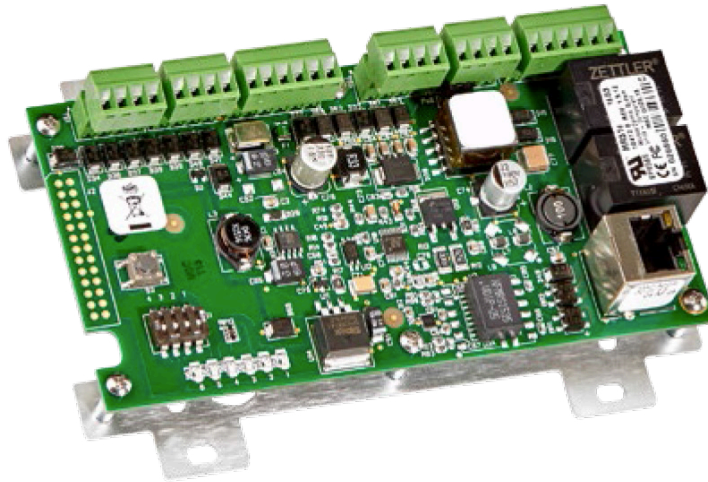

Description

The DS-51 dual-reader interface module connects up to two access control readers, controlling one door. Supporting a range of wired and wireless reader technology, the DS-51 is managed by a DS-501 controller.

Available Interfaces

- Readers: Up to 2 reader ports
- Inputs: 4 supervised, End of Line resistors
- Outputs: Form-C contacts: K1, K2: 5A @ 30Vdc

Specifications

Model	DS-51
Dimensions	5.5 in × 2.75 in (140 mm × 70 mm)
Operating Temperature	-55°C to +85°C for storage 0°C to +70°C while operating
Communications Ports	Ethernet, 10Base-T/100Base-TX
Certifications	UL 294 and UL 294B Recognized, CE Compliant, ROHS, FCC Part 15 Class A, NIST Certified Encryption, EN-60839-11-1
Warranty	24-month warranty (please refer to Genetec Sales Policy for more information)