

OPTICAL NETWORK VIDEO TECHNOLOGIES

18-port 100M&1000M PoE Switch



OVERVIEW

DS16P0E series is an Discovery-developed PoE Switch. 16*100M RJ45 port and 2*Gigabit uplink ports. Port 1-16 support IEEE 802.3af/at standard PoE power supply, single-port PoE power up to 30W. PoE output total power is 200W. As a PoE power supply device, it can automatically detect and recognize the power-receiving devices that meet the standards and supply power through the network cables. Power supply for PoE terminal equipment such as wireless AP, web cameras, VOIP phones, and video door intercoms can be powered by network cables to meet the demand for high-density PoE power supply network environment. It is suitable for hotels, campuses, factory dormitories, and small and medium-sized enterprises to set up an economy. Efficient network. Non-network management models, plug and play, no configuration, easy to use

FEATURE

- **10/100M POE Port With Gigabit Uplink**
- 16*10/100M RJ45 Port +2*10/100/1000M RJ45 Port
- Support non-blocking wire-speed forwarding and transmit more smoothly.
- Support full duplex based on IEEE802.3x and half duplex based on Backpressure

- **Intelligent POE Power Supply Function**
- 16*10/100M Base-TX RJ45 PoE ports, meeting the needs of security monitoring, teleconferencing system, wireless coverage and other scenarios.
- Comply with IEEE 802.3af/at PoE power supply standard, automatic identification of PoE equipment for power supply, no damage to non PoE equipment. The maximum PoE output power of the whole machine is 200W, and the maximum PoE output power of single port is 30W.
- The PoE port supports priority mechanism. When the residual power is insufficient, the power supply of high priority ports is guaranteed, so that the equipment is overloaded.

- **Easy To Use**
- Plug and play, no configuration, simple and convenient.
- With function switch, port 9-16 support 10M/250 meters long distance transmission mode when one key is opened.
- The user can easily understand the working state of the device through the power indicator lamp (Power) and the port status indicator (Link/Act).
- Support desktop and 1U-19 inch cabinet installation.


- **The Equipment Is Stable And Reliable**
- The host has low power consumption, no fan mute design, and metal case to ensure stable operation of the product.
- It uses high redundancy design to provide stable PoE power output for a long time.
- The equipment meets the national CCC standard and is in full compliance with the safety requirements of CE, FCC, and ROHS. It is safe and reliable to use.

TECHNICAL SPECIFICATION


| Model | Discovery DS16POE | Discovery DS24POE |
|-------------------------------|--|---|
| Inherent port | 16*10/100Base-TX POE Ports (Data/Power) 2*10/100/1000Base-TX Uplink RJ45 Ports (Data) | 24*10/100Base-TX POE Ports (Data/Power) 2*10/100/1000Base-TX Uplink RJ45 Ports (Data) |
| PoE Port | 1-16 ports support IEEE802.3af/at standard PoE power supply | 1-24 ports support IEEE802.3af/at standard PoE power supply |
| Functional Switch | 1* (Extender) After opening, port 9-16 support 10M/250 meter long distance transmission. | 1* (Extender) After opening, port 17-24 support 10M/250 meter long distance transmission. |
| | Note: when the switch state changes, it must be restarted before the switch function can take effect | |
| Network Protocol | IEEE802.3 10BASE-T; IEEE802.3i 10Base-T; IEEE802.3u 100Base-TX; IEEE802.3ab 1000Base-T; IEEE802.3x | |
| PoE Standard | IEEE802.3af/at | |
| Ethernet Port Feature | 10/100 BaseT(X), 10/100/1000BaseT auto-detection, full/half-duplex MDI/MDI-X auto-sensing | |
| Forwarding Mode | store and forward(Full Wire Speed) | |
| Switching Capacity | 14.8Gbps (Non-blocking) | |
| Forwarding Rate@64byte | 5.36Mpps | 6.55Mpps |
| MAC address entry | 16K | |
| Buffer Memory | 4K | |
| UTP Transceiver | 10BASE-TX ; Cat5 or later UTP(≤250 meter) 100BASE-TX ; Cat5 or later UTP(≤100 meter) 1000BASE-T ; Cat5e or later UTP(≤100 meter) | |
| Power Pin Assignment | Default 1/2(+), 3/6(-);Optional 4/5(+), 7/8(-) | |
| MAX / AVERAGE Power Per Port | 30W/15.4W | |
| Total PWR / Input Voltage | 200W (AC100-240V) | 250W (AC100-240V) |
| Power Consumption | Standby: <15W; Full load: <200W | Standby: <20W; Full load: <250W |
| LED | Power indicator light: PWR (green); network indicator: Link/Act (yellow); PoE work indicator: PoE (green) | |
| Power Supply | Built in AC: 100-240V 50-60Hz 4.1A | Built in AC: 100-240V 50-60Hz 4.1A |
| Operation TEMP / Humidity | -20- +55°C%5%-90% RH (Non condensing) | |
| Dimension (L*W*H) | Package weight | |
| Net /Gross Weight | Package weight | Package weight |
| installation method | | |
| Anti-surge / Protection Level | | |
| Certification | | |
| Warranty | Package weight | 1kg |

| | | |
|-------------------------------|--|---------------|
| Storage TEMP / Humidity | -40- +75°C%5%-95% RH (Non condensing) | |
| Dimension (L*W*H) | 270*181*44.5mm | 330*204*44mm |
| Net /Gross Weight | <1.7kg / <2.2kg | <2.3kg / <3kg |
| installation method | desktop type ,wall mounted type,hanging type | |
| Anti-surge / Protection Level | Anti-surge:4KV 8/20us; Protection Level:IP30 | |
| Certification | 3C CE mark, commercial;CE/LVD EN60950; FCC Part 15 Class B;ROHS; | |
| Warranty | 1 Year (2 Years for Power Supply), lifelong maintenance. | |

TECHNICAL SPECIFICATION

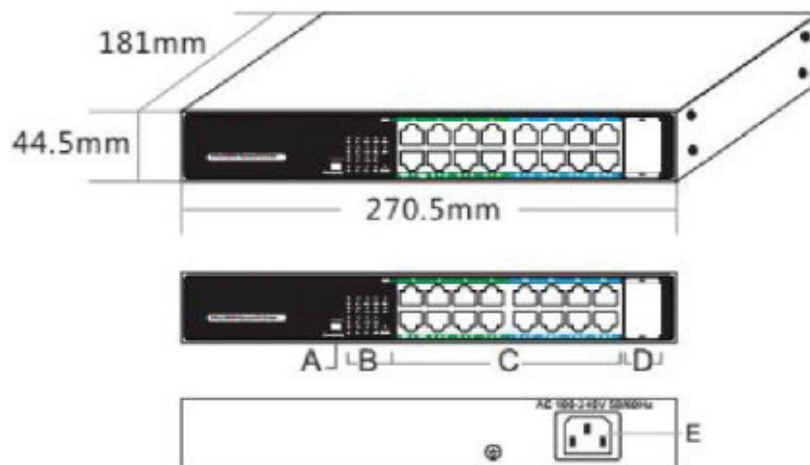

- A.Multi-functional switch B.Working LED indicator
 C.16*PoE port D.2*10/100/1000M uplink RJ45 port
 E.Power input port AC100-240,50/60Hz

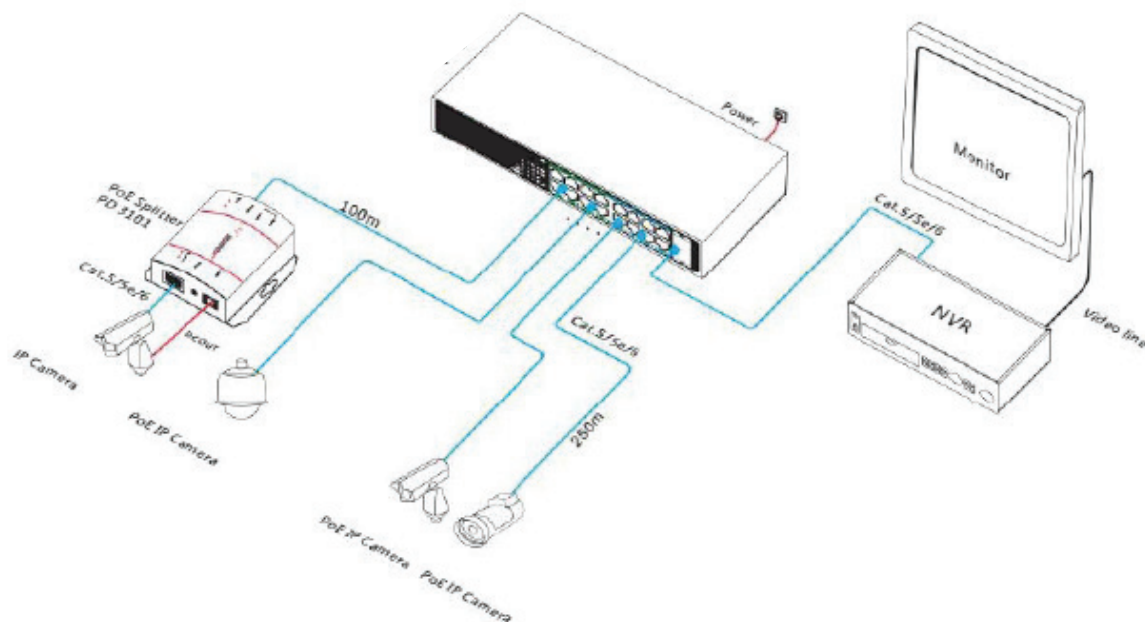

PACKING LIST

| PACKING LIST | CONTENT | CONTENT | CONTENT |
|--------------|--|---------|---------|
| | 18-port 10/100M & 10/100/1000M PoE Switch(DS16POE) | 1 | SET |
| | AC power line | 1 | PC |
| | hardware installation kit | 1 | SET |
| | user guide | 1 | PC |
| | warranty card and certificate of qualification | 1 | PC |

ORDERING INFORMATION

| MODEL | DESCRIPTION |
|---------------|---|
| AC power line | 16* 10/100M RJ45 port +2* 10/100/1000M uplink RJ45 port non management PoE switch, port 1-16 support IEEE 802.3af/at PoE Standard, PoE output total power is 200W, port 9-16 support long-distance 10M/ 250m transmission, with built-in power supply. |
| AC power line | 24* 10/100M RJ45 port +2* 10/100/1000M uplink RJ45 port non management PoE switch, port 1-24 support IEEE 802.3af/at PoE Standard, PoE output total power is 250W, port 17-24 support long-distance 10M/ 250m transmission, with built-in power supply. |